


## ADS Quick Reference on Transformers And Fuses

The ADC44 208/240v, 3-phase, 60a, 4-wire

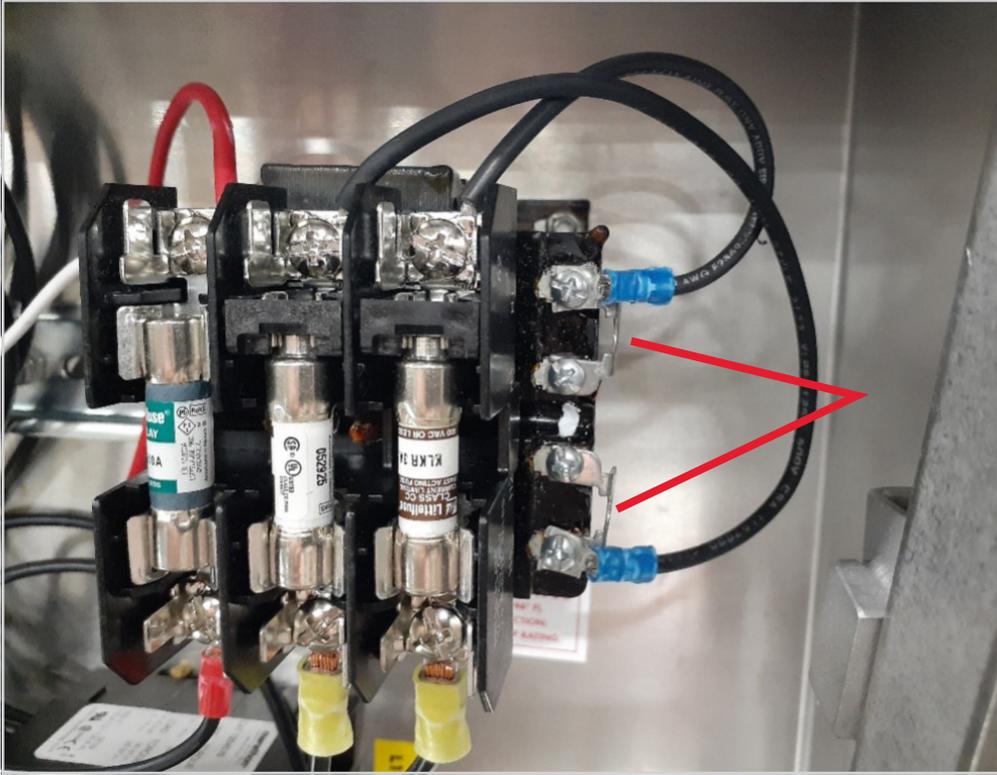

100 VA Transformer 291-3004 (only used on ADC44 208/240v model)

Jumpers are **outboard**. Two Primary 3amp 291-9101. One Secondary 1.6amp 291-9102.



291-9101



291-9102



Secondary black to XF, white to X2

## The ADC44 208/240v, 1-phase, 110a Dual Circuit


Circuit #1: 10-amp fuse 391-9102, Neutral wire, L1 phase wire, L2 phase wire.

Circuit #2: L1 phase wire, L2 phase wire.



391-9102

## The ADC66 208/240v, 3-phase, 90a, 4-wire

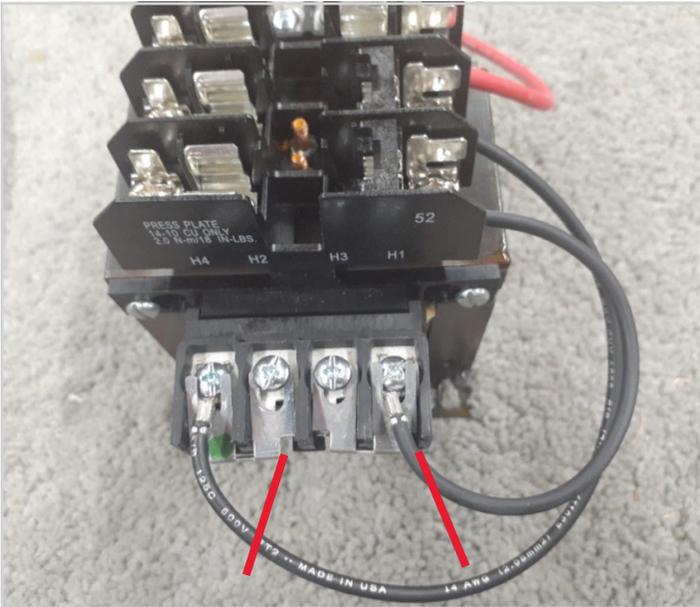

291-9111



291-9112




Secondary black to XF, white to X2

250 VA Transformer 291-3044

Jumpers are **Outboard**. Two Primary 1-amp 291-9111.

One Secondary 2.5-amp 291-9112.

## The ADC44 480v, 3-phase, 24-amps, 4-wire

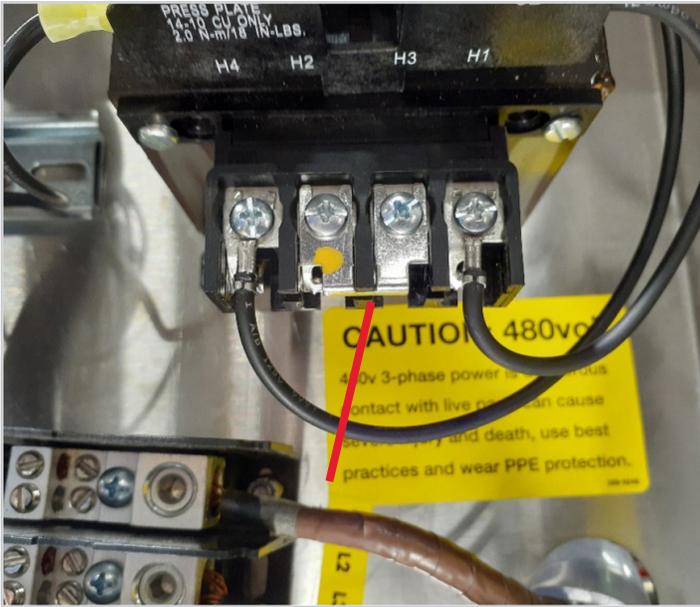

250 VA Transformer 291-3044

Jumpers are **Inboard**. Two Primary 1-amp 291-9111.  
One Secondary 2.5-amp 291-9112.



291-9111



291-9112



Secondary black to XF, white to X2

## The ADC66 480v, 3-phase, 35-amp, 4-wire



250 VA Transformer 291-3044

Jumpers are **Inboard**. Two Primary 1-amp 291-9111.  
One Secondary 2.5-amp 291-9112.



291-9111



291-9112



Secondary black to XF, white to X2



### **American Dish Service**

**Manufacturer of low and high temperature Commercial  
Dishwashers and Glasswashers**

**© American Dish Service**

900 Blake Street | Edwardsville, Kansas, 66111  
913.422.3700 | Toll-Free: 800.922.2178 | Fax: 913.422.6630  
orders@americandish.com | **americandish.com**

