
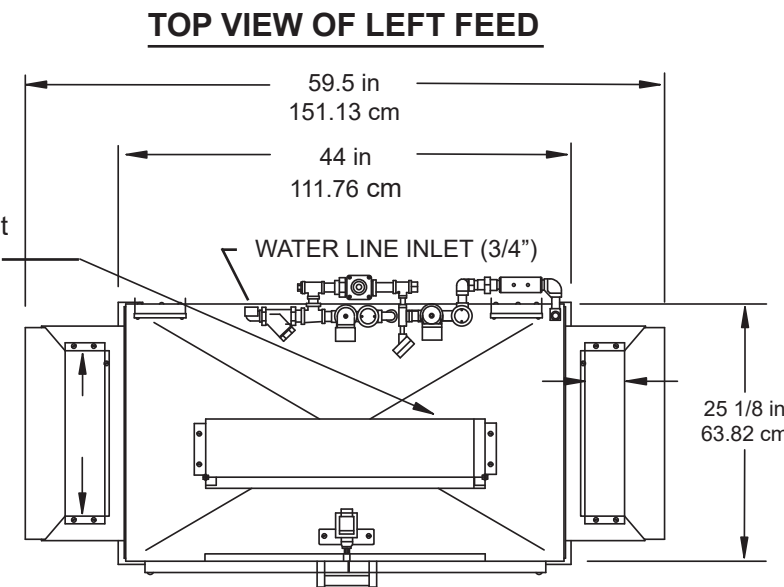


## Model ADC-44-T Specifications

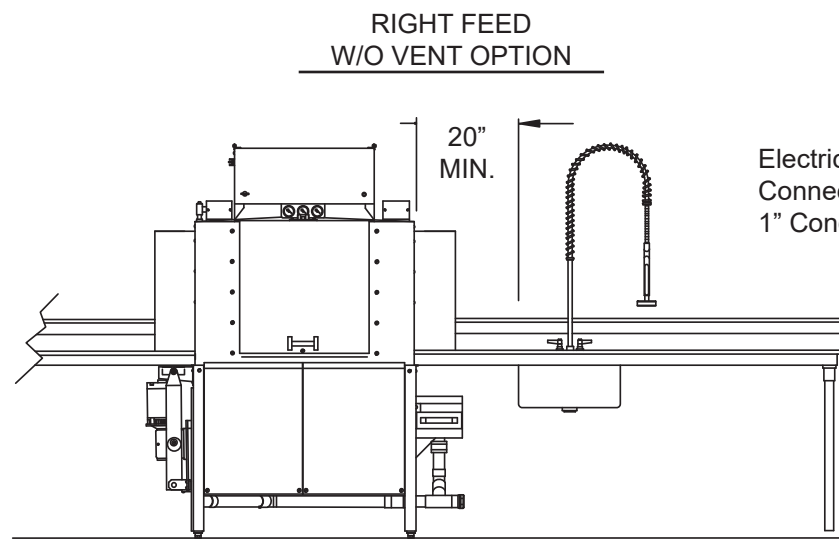

### ADC-44 Tall

**NSF RATED CAPACITY**  
**CONVEYOR SPEED**

**WATER CONSUMPTION**

**TOTAL GAL. PER HR.**

**FINAL RINSE TEMP (20 psi)**

**SANITIZER**

**ELECTRICAL POWER SUPPLY . . . . . 208/240V, 3PH, 60 AMP, 60 HZ**

*3 Phase installation requires 6 guage wires, a suitable ground, and a clean circuit.*

**1 PH, 50/60 AMP, 60 HZ**

*1 Phase installation requires one(1) 50 Amp service using 8 guage wires with a 10 gauge neutral wire, and one(1) 60 Amp service using 6 guage wires and a suitable ground, both on clean circuits.*

**MOTOR RATINGS . . . . . 3 HP WASH, 1/3 HP RINSE**

**1/3 HP CONVEYOR**

**HEATER RATINGS. . . . . 12 KW WASH, 2.25 KW RINSE**

**RACK SIZE . . . . . STANDARD 19.75" x 19.75"**

or 50.2 cm x 50.2 cm

**ACCESS DOOR CLEARNCE . . . . . 21" x 24.5"**

53.34 cm x 62.2 cm

**RACK CLEARANCE (Through machine) . . . . . 19.25" x 20.75"**

48.9 cm x 52.7 cm

**WATER INLET . . . . . (3/4" F.P.T.)**

**DRAIN SIZE . . . . . (2" F.P.T.)**

**HEIGHT (with door open) . . . . . 85.75"**

(87.25" or 221.62 cm with control box cover open)

**WIDTH (OVERALL) . . . . . 59.5"**

151.13 cm

**WIDTH, TABLE TO TABLE . . . . . 44"**

111.7 cm

**DEPTH . . . . . 30"**

76.2 cm

**SHIPPING WEIGHT . . . . . 780 POUNDS**

353.8 kg

**SHIPPING VOLUME (CRATED) . . . . . 128.7 CU. FT.**

3.64 cu meters

### IMPORTANT NOTES

Both clean and soiled tables are to be bolted to the dishmachine with the 1/4-20 x 1/2" bolts and nuts provided.

Leaks cause potential problems in electrical and mechanical areas under the machine.

Quick drains (table scuppers) are not compatible with stage type conveyor dishmachines.

Scrap sinks shall be no closer than 20" minimum from the dishmachine end of the table.



The clean exit table should be at least 72" straight for efficient conveyor operation.

Electrical and plumbing connections must be made by a qualified service person who will comply with all appropriate state and local health, electrical, plumbing, and safety codes.

the Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.


### NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

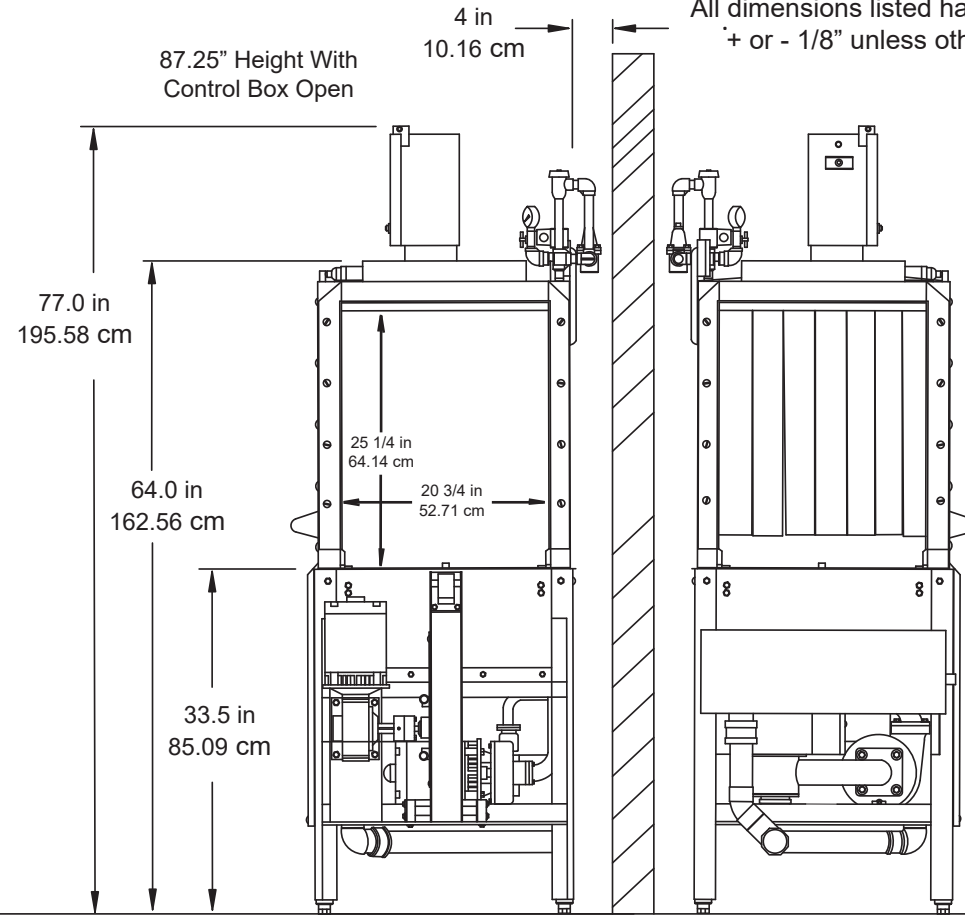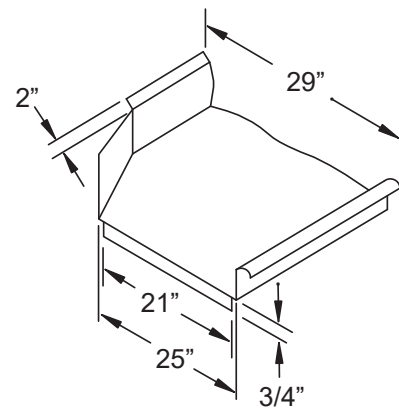

**CLEANSIDE VIEW**

**SOILSIDE VIEW**

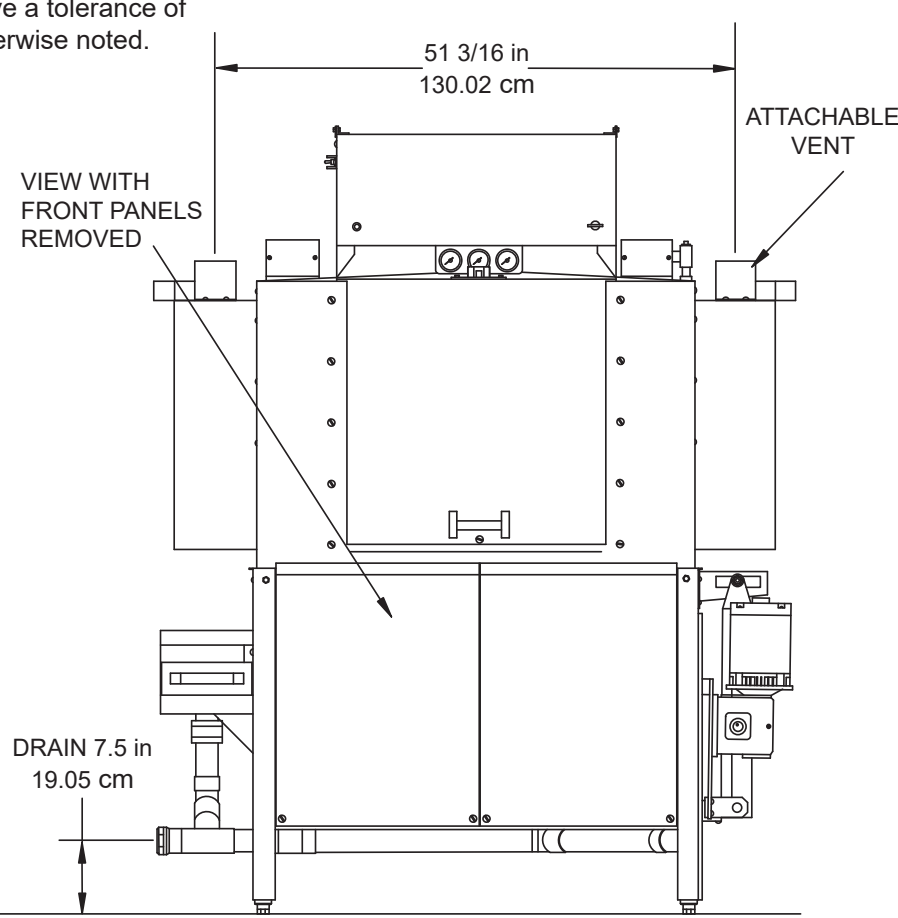

**FRONT VIEW**