



LEFT FEED
W/O VENT OPTION

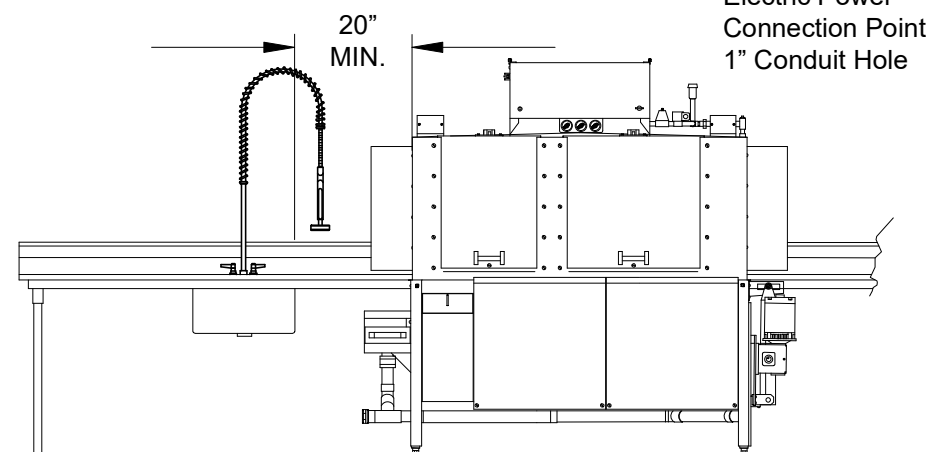

TOP VIEW OF LEFT FEED

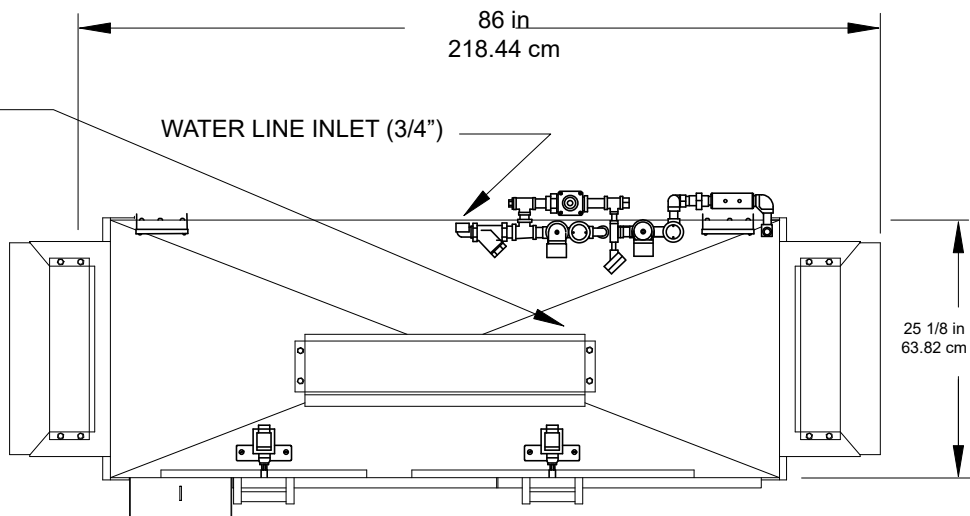

Model ADC-66 TALL Specifications

IMPORTANT NOTES

Both clean and soiled tables are to be bolted to the dishmachine with the 1/4-20 x 1/2" bolts and nuts provided.

Leaks cause potential problems in electrical and mechanical areas under the machine.

Quick drains (table scuppers) are not compatible with stage type conveyor dishmachines.

Scrap sinks shall be no closer than 20" minimum from the dishmachine end of the table.


The clean exit table should be at least 72" straight for efficient conveyor operation.

Electrical and plumbing connections must be made by a qualified service person who will comply with all appropriate state and local health, electrical, plumbing, and safety codes.

The Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.


NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

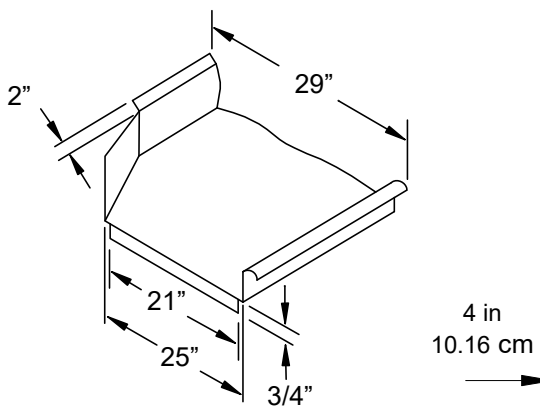


4 in
10.16 cm


88.5" Height With
Control Box Open

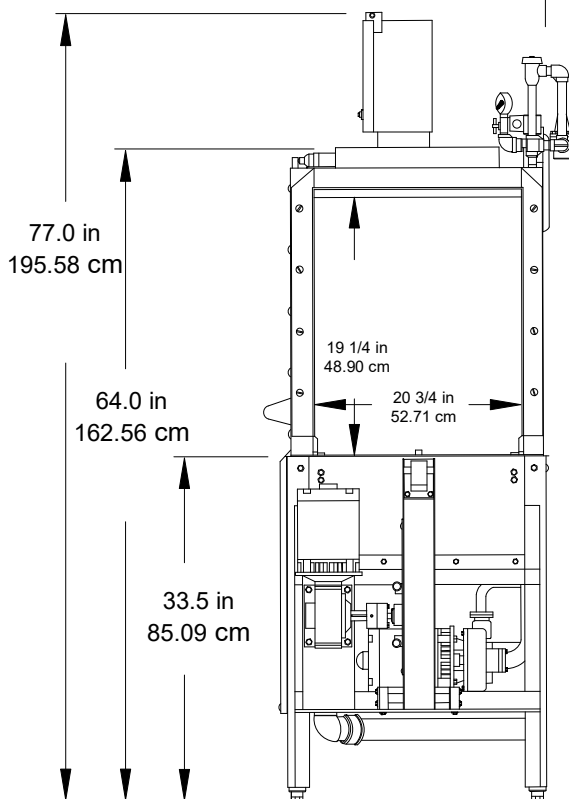

CLEANSIDE VIEW

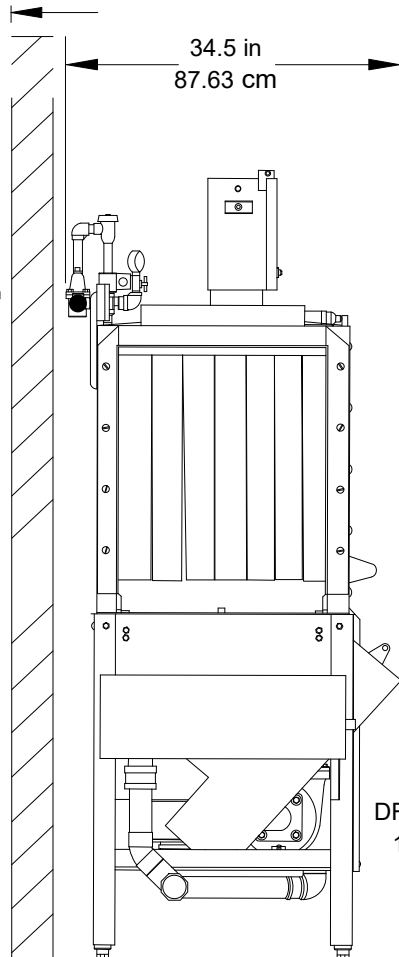

SOILSIDE VIEW

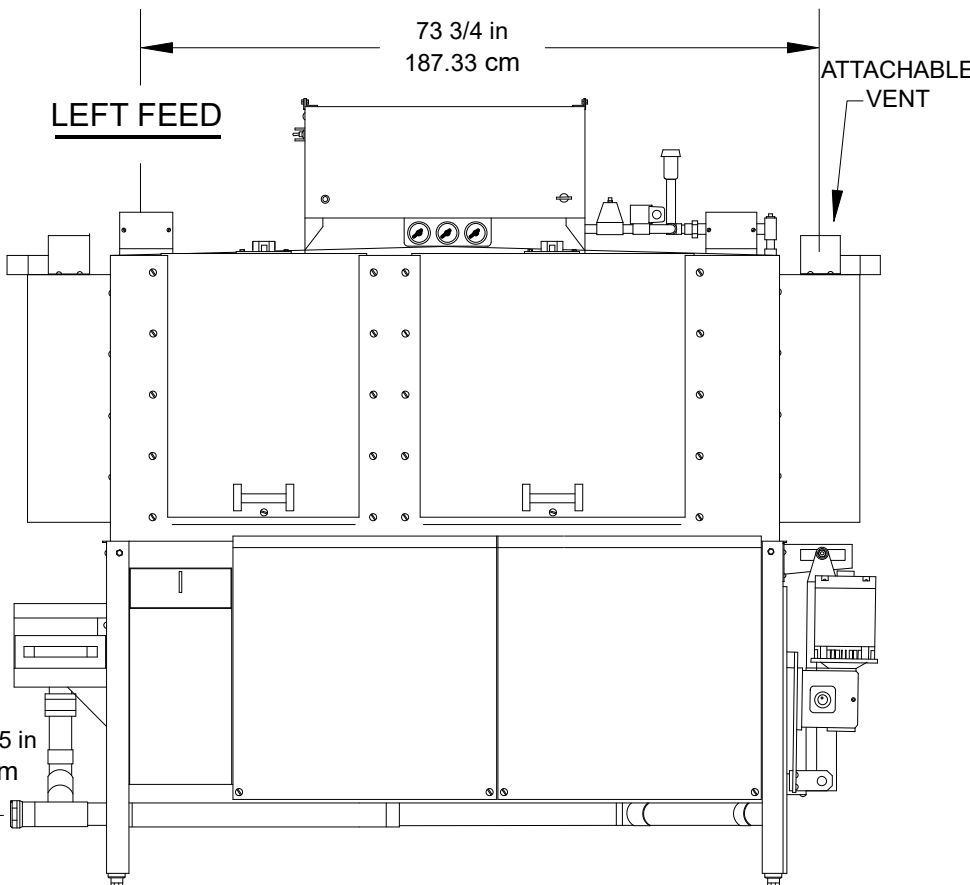

FRONT VIEW

ADC-66 Tall

**NSF RATED CAPACITY
CONVEYOR SPEED**

WATER CONSUMPTION

TOTAL GAL. PER HR.

FINAL RINSE TEMP (20 psi)

SANITIZER

ELECTRICAL POWER SUPPLY

FAMILY MODELS (left or right feed)

ADC-66 Tall

HOT TEMP.

244 rack/hr

6.7 ft/min

2.07 meters

.39 gal/rack

or 1.8 liters

92.69 gph

or 454.2 liters

180 Deg. F/82.2 C

180 Deg. F WATER

50 ppm CHLORINE

208/240V, 3PH, 90 AMP, 60 HZ

ADC-66 Tall

CHEMICAL

244 rack/hr

6.7 ft/min

2.07 meters

.39 gal/rack

or 1.8 liters

92.69 gph

or 454.2 liters

120 Deg. F/48.8 C

50 ppm CHLORINE

208/240V, 3PH, 90 AMP, 60 HZ

3 Phase installation requires 3 guage wires with a 10 guage neutral wire, a suitable ground, and a clean circuit.

MOTOR RATINGS 1 1/2 HP SCRAP, 3 HP WASH, 1/3 HP RINSE

1/3 HP CONVEYOR

HEATER RATINGS. 18 KW WASH, 2.25 KW RINSE

RACK SIZE STANDARD 19.75" x 19.75"

or 50.2 cm x 50.2 cm

ACCESS DOOR CLEARANCE 15" x 24.5"

38.1 cm x 62.2 cm

RACK CLEARANCE (Through machine) 19.25" x 20.75"

48.9 cm x 52.7 cm

WATER INLET (3/4" F.P.T.)

DRAIN SIZE (2" F.P.T.)

HEIGHT (with door open) 79.75"

(87.25" or 221.62 cm with control box cover open) 202.57 cm

WIDTH (OVERALL) 86"

162.5 cm

WIDTH, TABLE TO TABLE 66"

111.7 cm

DEPTH 34.5"

87.6 cm



SHIPPING WEIGHT 978 POUNDS

444 kg

SHIPPING VOLUME (CRATED) 176 CU. FT.

6.44 cu meters

Model ADC-66 TALL Specifications

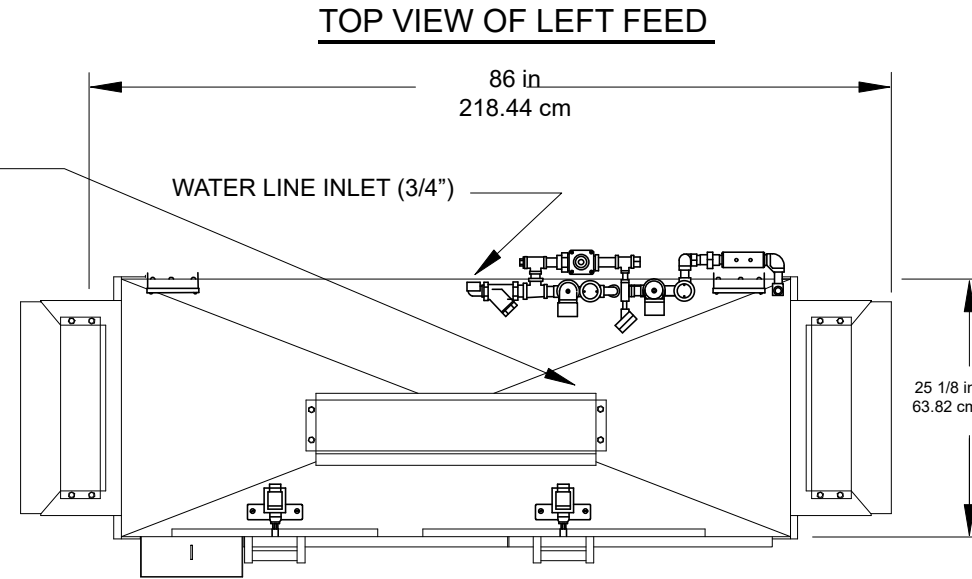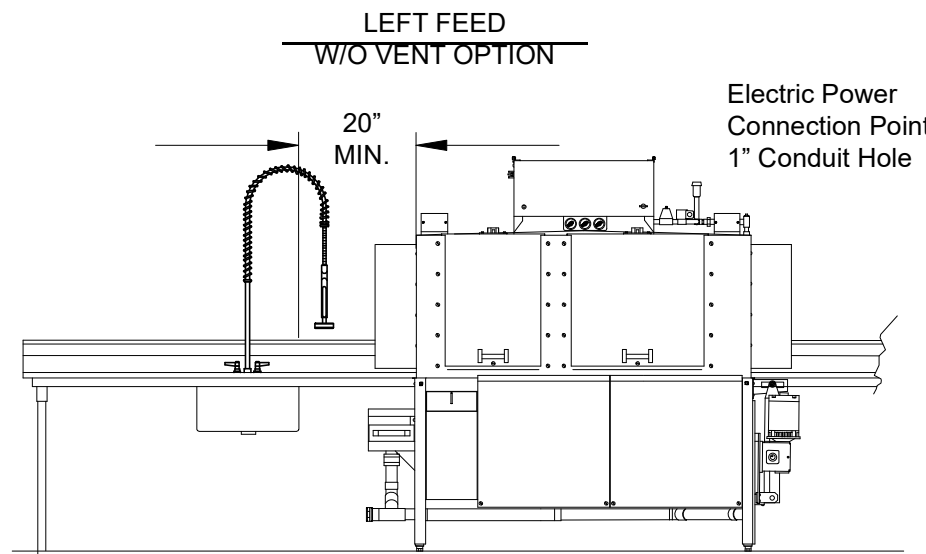

ADC-66 Tall

**NSF RATED CAPACITY
CONVEYOR SPEED**

WATER CONSUMPTION

TOTAL GAL. PER HR.

FINAL RINSE TEMP (20 psi)

SANITIZER

ELECTRICAL POWER SUPPLY 208/240V, 3PH, 90 AMP, 60 HZ

FAMILY MODELS (left or right feed)

**ADC-66 Tall
HOT TEMP.**

**244 rack/hr
6.7 ft/min**

**2.07 meters
.39 gal/rack**

**or 1.8 liters
92.69 gph**

**or 454.2 liters
180 Deg. F/82.2 C**

180 Deg. F WATER

50 ppm CHLORINE

**ADC-66 Tall
CHEMICAL**

**244 rack/hr
6.7 ft/min**

**2.07 meters
.39 gal/rack**

**or 1.8 liters
92.69 gph**

**or 454.2 liters
120 Deg. F/48.8 C**

50 ppm CHLORINE

3 Phase installation requires 3 guage wires with a 10 gauge neutral wire, a suitable ground, and a clean circuit.

MOTOR RATINGS 1 1/2 HP SCRAP, 3 HP WASH, 1/3 HP RINSE

1/3 HP CONVEYOR

HEATER RATINGS. 18 KW WASH, 2.25 KW RINSE

RACK SIZE STANDARD 19.75" x 19.75"

ACCESS DOOR CLEARANCE 15" x 24.5"

RACK CLEARANCE (Through machine) 19.25" x 20.75"

WATER INLET (3/4" F.P.T.)

DRAIN SIZE (2" F.P.T.)

HEIGHT (with door open) 79.75"

(87.25" or 221.62 cm with control box cover open) 202.57 cm

WIDTH (OVERALL) 86"

162.5 cm

WIDTH, TABLE TO TABLE 66"

111.7 cm

DEPTH 34.5"

87.6 cm

SHIPPING WEIGHT 978 POUNDS

444 kg

SHIPPING VOLUME (CRATED) 176 CU. FT.

6.44 cu meters

IMPORTANT NOTES

Both clean and soiled tables are to be bolted to the dishmachine with the 1/4-20 x 1/2" bolts and nuts provided.

Leaks cause potential problems in electrical and mechanical areas under the machine.

Quick drains (table scuppers) are not compatible with stage type conveyor dishmachines.

Scrap sinks shall be no closer than 20" minimum from the dishmachine end of the table.


The clean exit table should be at least 72" straight for efficient conveyor operation.

Electrical and plumbing connections must be made by a qualified service person who will comply with all appropriate state and local health, electrical, plumbing, and safety codes.

the Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.


NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

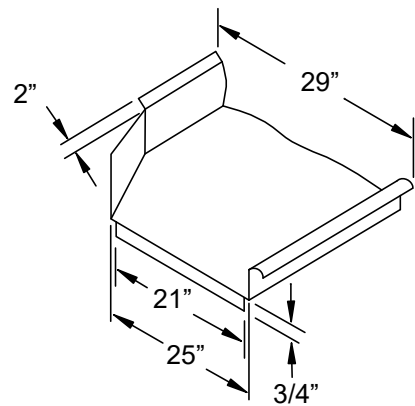


4 in
10.16 cm


88.5" Height With
Control Box Open

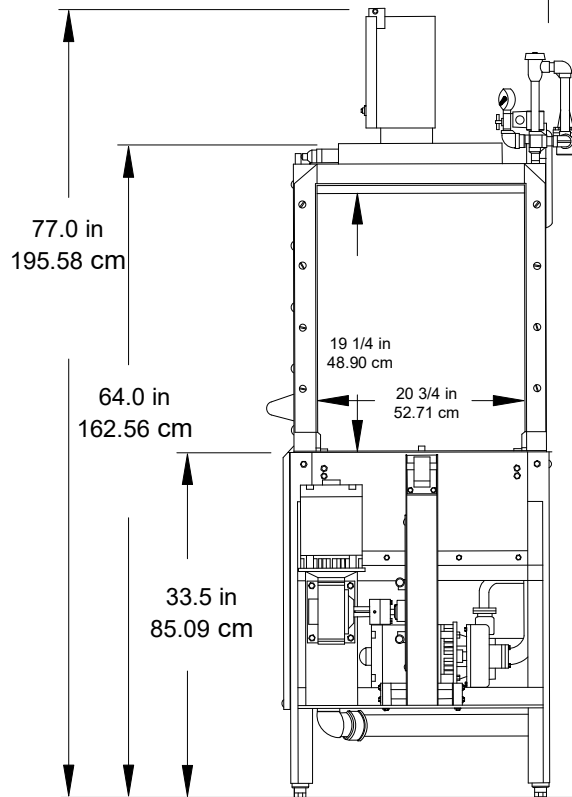

CLEANSIDE VIEW

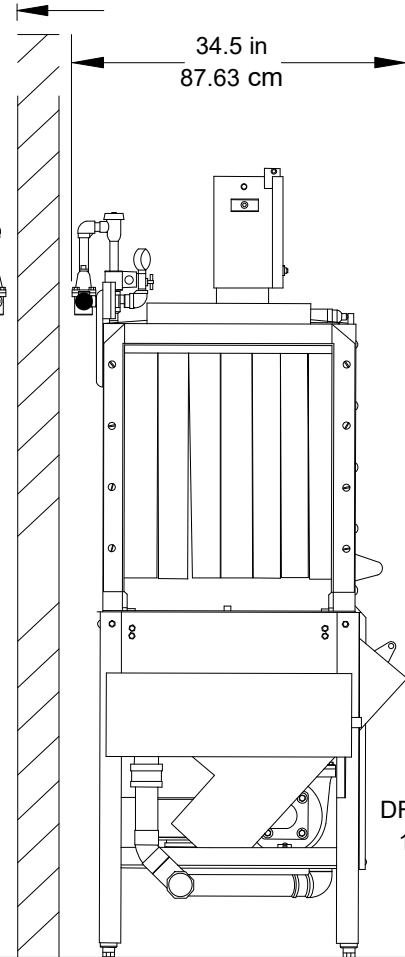

SOILSIDE VIEW

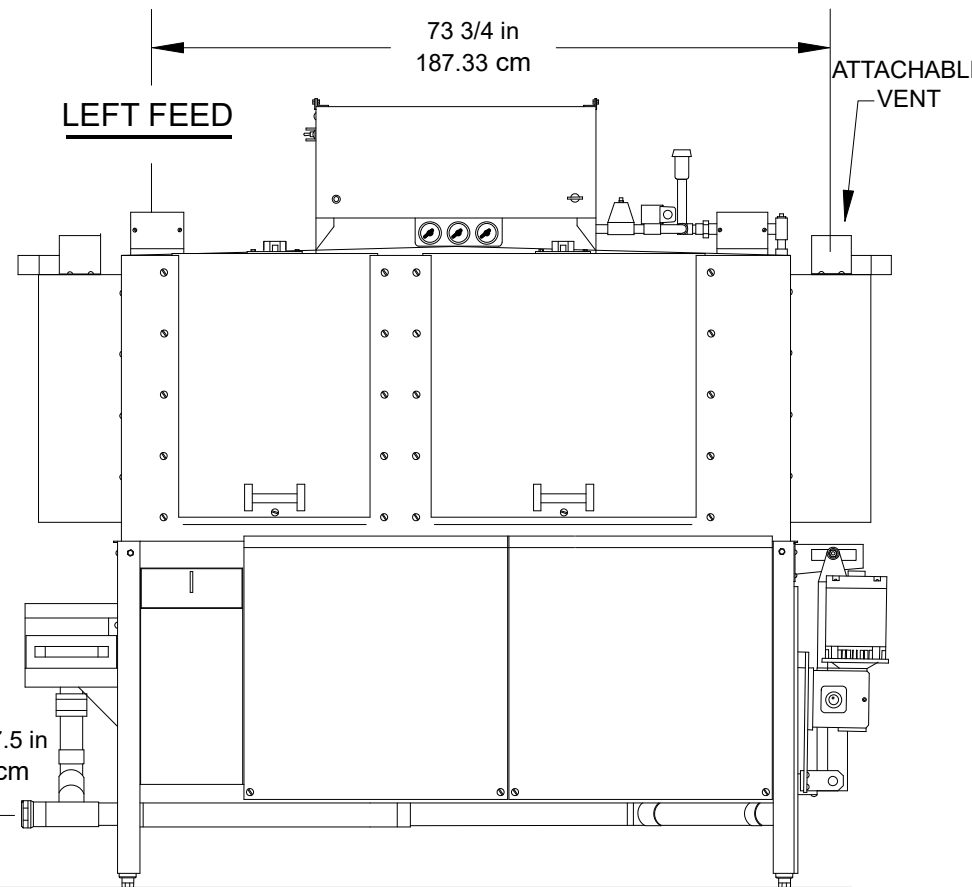

FRONT VIEW