
AMERICAN DISH SERVICE

Splash Shield for "3-Door Up" Machine

Part #087-6120



CAUTION

Use safety eye-wear whenever drilling metal, use caution with sheet metal parts, corners and edges that can cut or puncture skin if mishandled.

NOTICE

The shield can be used with models **AF-3DS**, **AFES**, and **L3DWS**. These models cannot be converted to a 2-door up machine and no kit is offered to change the model.

When a shield is desired for the open side of a 3-Door Up machine, the following instructions are provided to correctly install the splash shield made by ADS.



If the door against the wall on a corner machine is the side chosen to shield, remove the existing tray track rail. This is done by removing the bolts and nuts at the front and rear of the rail.



Remove and keep the locknuts and bolts




. . . then remove the guide rail from the slot



Lower forward mounting hole from tray track



Upper forward mounting hole is control box bolt

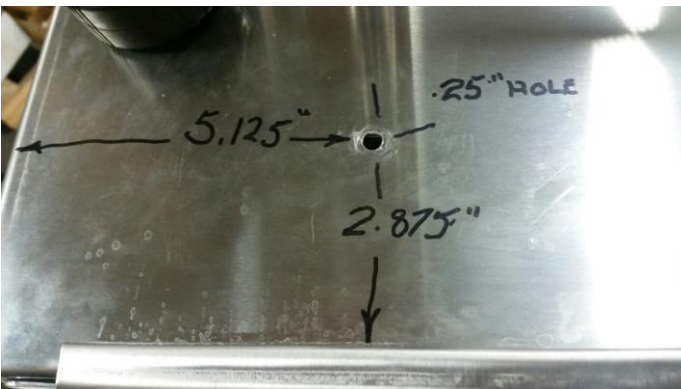

Drill a hole in the top of the hood on the left hand side, 5.125" from back, 2.875" from side of hood
Hole is for a 1/4" bolt, use a 9/32 (.281") drill for easier fit, seal bolt with flat washer.



Tray track may need to be lowered to fit shield inside



Note: shield tabs should point inward



Fasten the bolt and locknuts on the tray track



Make sure the upper spray arm clears shield



Showing finished install of shield