


**ASQII Dump Sink Weldment
Installation or Removal Kit (088-1125)**

085-6820 Dump Sink Weldment, 085-6821 Dump Sink Tray, 098-2912 Stainless Steel Washer, 089-6205 Rubber Washer, 292-1006 Brass Nut, 288-1065 Plug, Probe



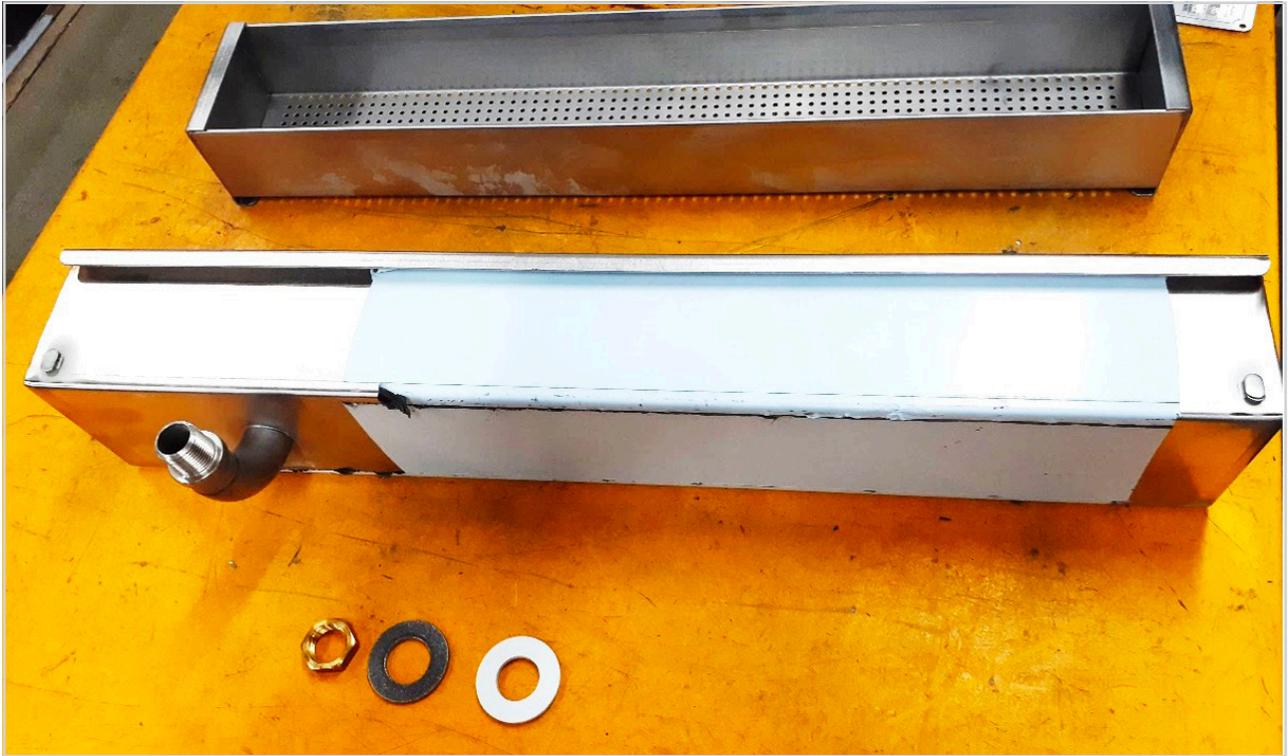

Showing from top to bottom, Dump Tray, Dump Weldment, Brass nut, Stainless Washer, and Rubber Washer.



Showing the order in which the rubber washer, stainless washer and brass nut are inside the tank.



To install, place the dump weldment on the front lip of the ASQII, press down while rotating the elbow's threaded end into the hole in the front of the tank. This holds the weldment in place. To remove, take the brass nut and washers off from inside the tank and pull the elbow out of the hole and lift the weldment off the lip of the tank.



With the Dump Weldment removed, place the probe plug in the open hole and tighten in place as shown below to finish the removal. To install a new Dump Weldment and Tray, follow these instructions in reverse order.



American Dish Service

**Manufacturer of low and high temperature Commercial
Dishwashers and Glasswashers**

© American Dish Service

900 Blake Street | Edwardsville, Kansas, 66111
913.422.3700 | Toll-Free: 800.922.2178 | Fax: 913.422.6630
orders@americandish.com | americandish.com

