



DASL Models Specifications

U.S. REGISTERED PATENTS

NFS Rated Capacity (Racks/Hr.)	74	50	24
Wash Time (Sec.)	50	60	75
Rinse Time (Sec.)	30	45	60
Dwell (Sec.)	10	15	15
Total Cycle Time (Sec.)	90	120	150
Water Temperature (Supply)	120° F Min. (49° C Min)		
Water Consumption098 Gallons Per Rack		
	Total 1.97 Gallons Per Cycle		
	3.72 Liters Per Rack		
	7.45 Liters Per Cycle		
Motor.	1.5HP		
Electrical Ratings	115 Volts, 15a, Single-Phase		
	Connect to clean circuit using 10-12 AWG copper wires.		
	Circuit protection 20a circuit breaker or fuse with 20a rating		
Rack Size (2 per cycle)	19.75" x 19.75" (50.2 cm x 50.2 cm)		
Door Clearance on DASL.	20.75" x 20.50"		
Water Inlet0.5" FPT		
Drain Exit2.0" Pipe		
Drain Height.	13" to Center		
Height DASL (Door Open)	80.5" or 204.4 cm		
Height DASL (Door Closed)	71.25" or 180.9 cm		
Width (Overall)	50.5" or 128.2 cm		
Width (Table to Table).25" or 63.5 cm		
Depth (Overall)30" or 76.2 cm		
Shipping Weight DASL380 lb. or 172.3 kg		
Shipping Dimensions DASL	36" L x 60" W x 78"H		
	91.4 cm x 152.4 cm x 198.1 cm		




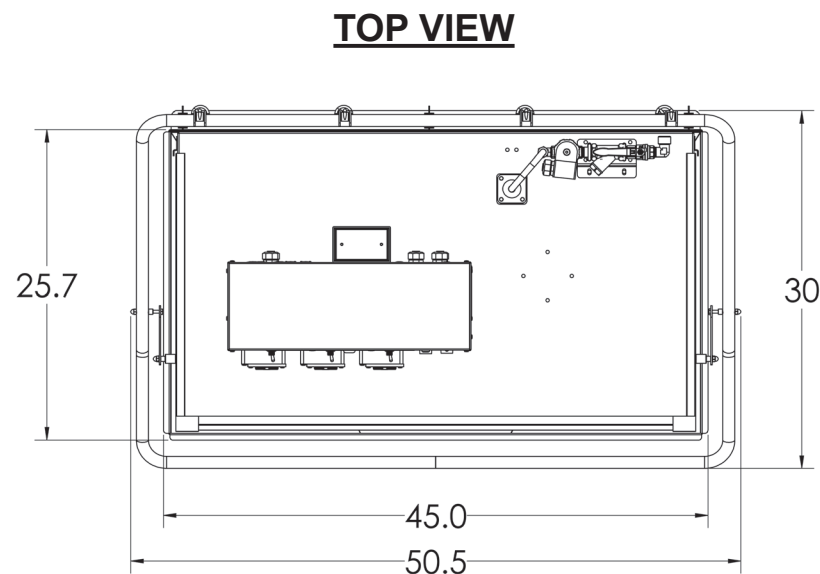


Table Specification Detail

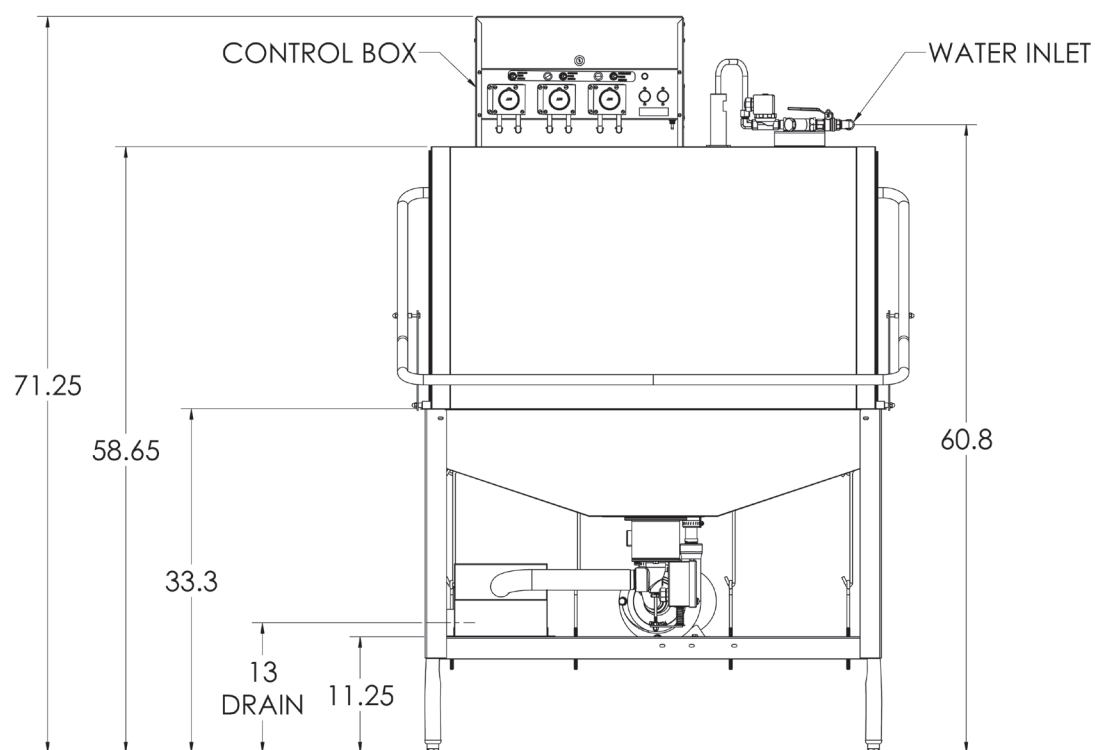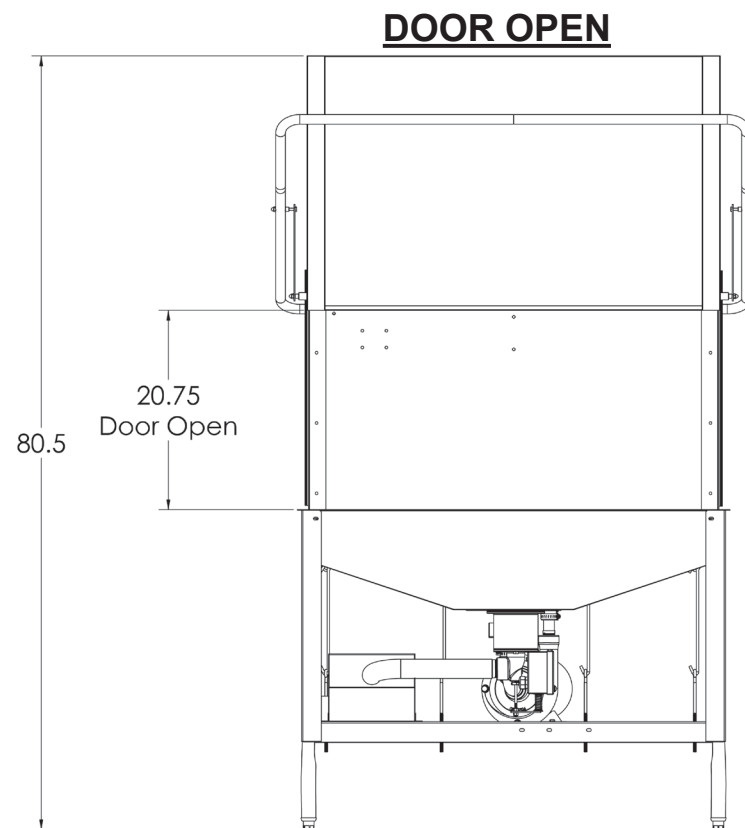

FRONT VIEW

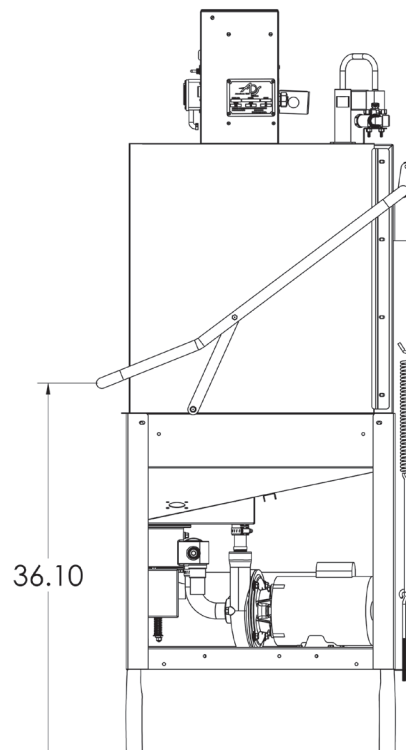

SIDE VIEW

Note:
All dimensions listed have a tolerance of +/- 1/8" unless otherwise noted..
Manufacturer reserve the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

Caution:
Electrical and Plumbing connection must be made by a qualified Service Person who will ensure that the installation complies with all applicable federal, state and local Health, Electrical, Plumbing, and Safety Codes.