

Model – DASL



Unique Single Lift

Designed to allow for one double rack machine to work in every application.

Features and Benefits

Newly Featured NOKAM timer allows for 90, 120, and 150 second timer settings.

- **Energy Star Rated:** Low energy consumption @.98 Gallons per rack.
- **Durable Stainless Steel 1.5 Hp Pump:** Built for longevity and reliability.
- **Auto Start Feature:** Just slide in the rack of wares and shut the door.
- **Flexible and Efficient:** Easily converts from pass-thru to corner. Able to wash multiple sheet pans. Large **20.5" door clearance**.
- **Ease of Operation:** Closed Loop arm bar allows for effortless operation.
- **Easy Maintenance:** Simple to clean and maintain. Easy lift out drain, built in scrap accumulator, and easily removeable spray arms for cleaning.
- **Dual Screen Pump Protection.**
- **On board chemical delivery system.**
- **Configure for corner:** Kit #087-6120 Splash Shield

For detailed specifications, go to
www.americandish.com



Door Open



Door Closed



© American Dish Service

900 Blake Street | Edwardsville, Kansas, 66111
Phone: 913.422.3700 | Toll-Free: 800.922.2178 | Fax: 913.422.6630
orders@americandish.com | americandish.com

Model – DASL

Unique Single Lift

Designed to allow for one double rack machine to work in every application.


Recommended Options

IRMA Fully Programmable Control Head

Our innovative, low maintenance, machine controller reduces costly service visits. With fully programmable features, and Bluetooth connectivity for monitoring.

Hubbell Heat Booster

Hubbell Heat Booster ensures a steady supply of 130°–140° water for proper cleaning and sanitation.

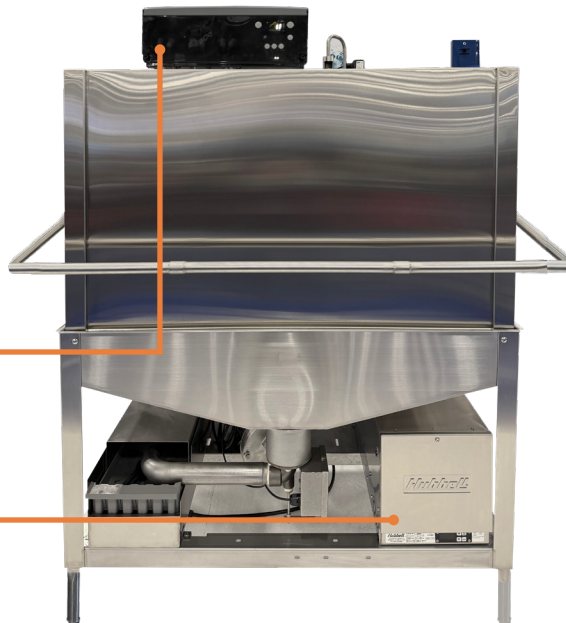

Model – DASL Specifications

U.S. REGISTERED PATENTS


NSF Rated Capacity (Racks/Hr.)	72	55	45
Wash Time (Sec.)	50	60	75
Rinse Time (Sec.)	22	37	52
Dwell (Sec.)	18	23	23
Total Cycle Time (Sec.)	90	120	150
Water Temperature (Supply)	120° F Min. (49° C Min)		
Water Consumption	0.98 Gallons Per Rack Total 1.97 Gallons Per Cycle 3.72 Liters Per Rack 7.45 Liters Per Cycle		

Motor 1.5HP
Electrical Ratings 115 Volts, 15a, Single-Phase
Connect to clean circuit using 10–12 AWG copper wires.
Circuit protection 20a circuit breaker or fuse with 20a rating


Rack Size (2 per cycle) 19.75" x 19.75" (50.2 cm x 50.2 cm)
Door Clearance on DASL 20.75" x 20.50"
Water Inlet 0.5" FPT
Drain Exit 2.0" Pipe
Drain Height 13" to Center
Height DASL (Door Open) 80.5" or 204.4 cm
Height DASL (Door Closed) 71.25" or 180.9 cm
Width (Overall) 50.5" or 128.2 cm
Width (Table to Table) 44" or 111.7 cm
Depth (Overall) 30" or 76.2 cm
Shipping Weight DASL 380 lb. or 172.3 kg
Shipping Dimensions DASL 36" L x 60" W x 78"H
91.4 cm x 152.4 cm x 198.1 cm

TOP VIEW

Typical Table Details

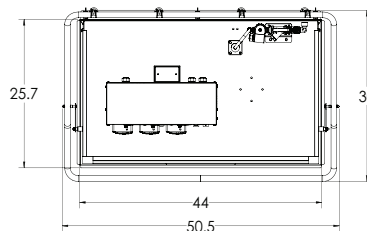


DOOR OPEN

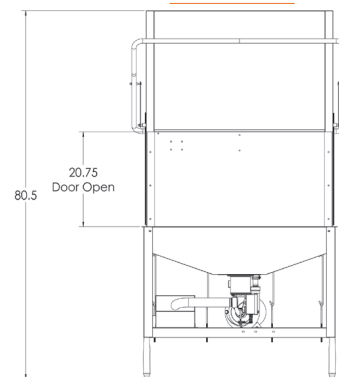


CAUTION:

Electrical and Plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety Codes.

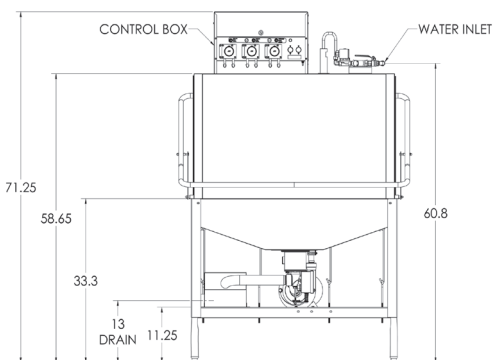

FRONT VIEW

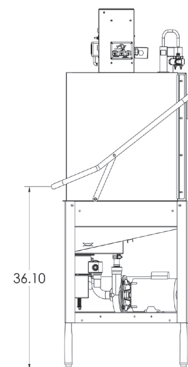

SIDE VIEW

All dimensions listed have a tolerance of $\pm 1/8"$ unless otherwise noted.

Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.



Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



© American Dish Service

900 Blake Street | Edwardsville, Kansas, 66111
913.422.3700 | Toll-Free: 800.922.2178 | Fax: 913.422.6630
orders@americandish.com | americandish.com